


FLP100GRD-NPE

Integral housing (N-PE spark-gap-based) combined lightning current and surge arrester for protection TT and TN-S systems ("3+1" circuit) against surges.

- Prewired spark-gap-based type 1 and type 2 combined lightning current and surge arrester
- Maximum systems availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment

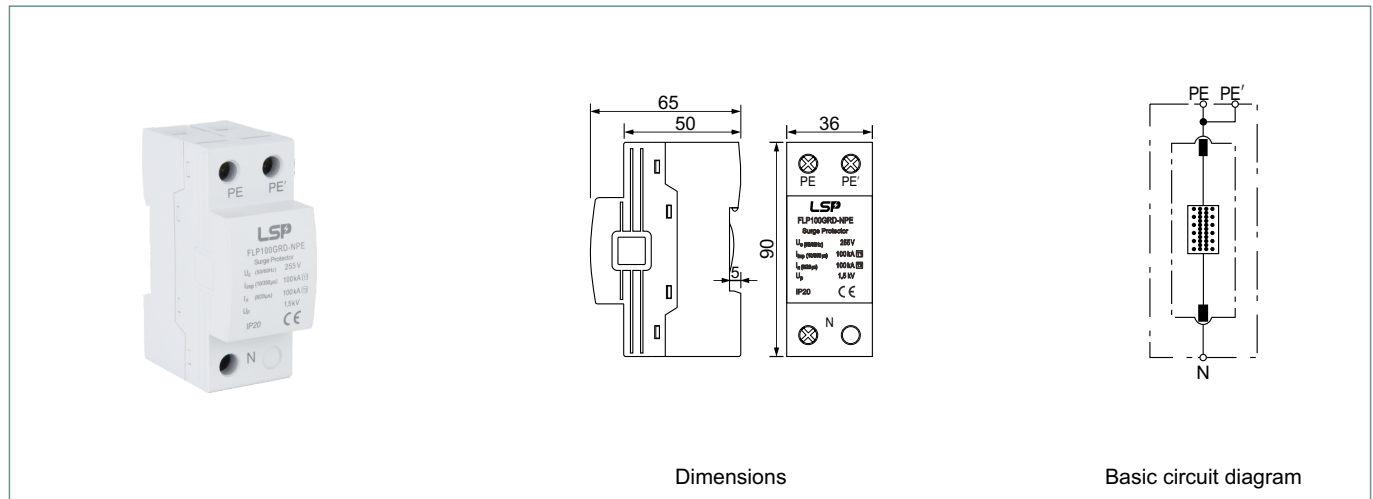

Type	FLP100GRD-NPE	
SPD according to EN 61643-11 / IEC 61643-11	type 1 + type 2 / class I + class II	
Energy coordination with terminal equipment (< 5m)	type 1 + type 2 + type 3	
Nominal a.c. voltage	U_n	230 / 400 V AC (50/60 Hz)
Max. continuous operating a.c. voltage [N-PE]	$U_{c(N-PE)}$	255 V AC (50/60 Hz)
Lightning impulse current (10/350µs) [N-PE]	I_{imp}	100 kA
Specific energy [N-PE] (W/R)		2,5MJ/ohms
Nominal discharge current (8/20µs) [N-PE]	I_n	100 kA
Voltage protection level [N-PE]	U_p	1,5 kV
Follow current extinguishing capability a.c.	I_{fi}	100 kA _{rms}
Response time	t_A	< 100 ns
Temporary overvoltage [N-PE] (TOV) (U_T) - Characteristic		1200 V / 200 ms. - withstand
Range of operating temperatures [parallel] / [series]	T_U	-40...+80°C / -40...+60°C
Operating state / fault indication		-
Number of ports		1
Cross-sectional area (N, PE, PE') (min.)		10 mm ² solid / flexible
Cross-sectional area (N, PE) (max.)		50 mm ² stranded / 35 mm ² flexible
Cross-sectional area (PE') (max.)		35 mm ² stranded / 25 mm ² flexible
For mounting on		35 mm DIN rail acc. to EN 60715
Enclosure material		thermoplastic
Place of installation		indoor installation
Degree of protection		IP20
Capacity		2 module(s), DIN 43880
Approvals		CE